

## Sportsman Series Accessory Adapter Kit

### Hardware



- Qty (1) Reversing relay module
- Qty (1) Wire harness 20'
- Qty (2) #6 stainless steel screws
- Qty (2) Yellow ring connectors
- Qty (3) Wire connectors push-on-Female

### Remove the original wiring harness

1. Disconnect the 12v supply prior to removing any wires.
2. After the 12v power source has been disconnected remove the wiring harness from the pump and the rocker switch.
3. Remove the disconnected wiring harness from the boat.

### Installing the Reversing Relay Module

- Step 1 Mount the reversing relay module within 18" of the hydraulic pump using the two supplied # 6 screws.
- Step 2 Connect the red to (Positive) and the black to (Negative) 12v power source with the (2) yellow ring connectors.
- Ensure the reversing Relay has a 30Amp fuse.
- Step 3 Connect the blue and green wires from the reversing relay to the blue and green wires on the Sportsman pump.

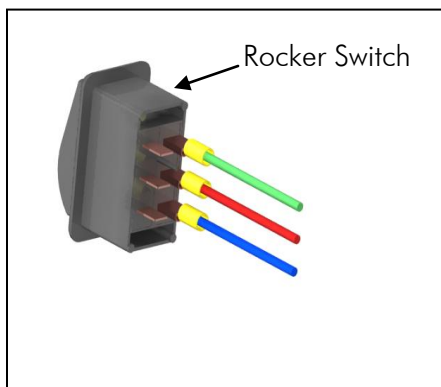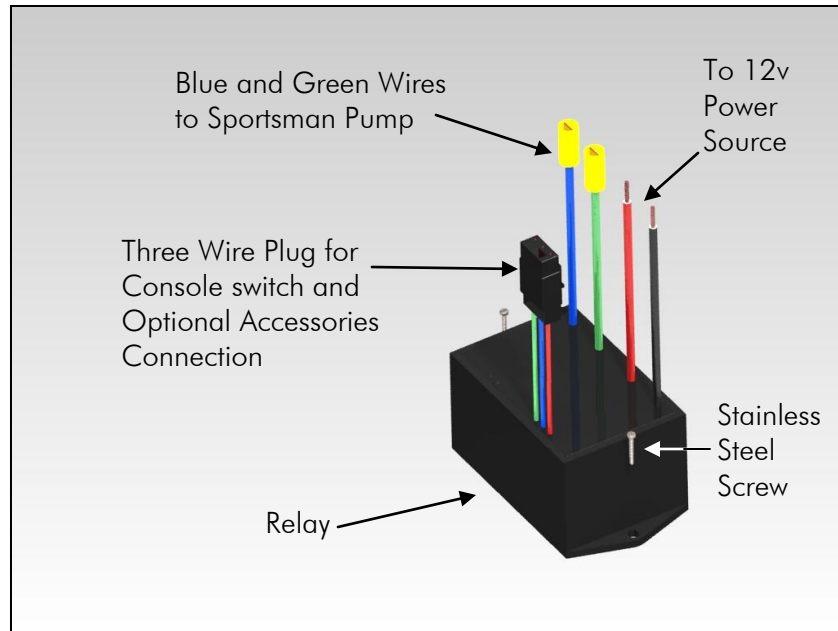

### Connecting the rocker switch and wiring harness

- Step 1 Route the new supplied wiring harness from the rocker switch to Sportsman pump. *Note:* the pin socket end of wiring harness needs to be at relay module.
- Step 2 Connect the three (3) supplied push-on-female wire connectors to the blue, red and green wire end of the wiring harness and connect to rocker switch as in picture to left.

